



KESSUP PRIMARY SCHOOL
BILL OF QUANTITIES FOR THE CONSTRUCTION OF V.I.P TOILETS AND BOYS &GIRLS LATRINES

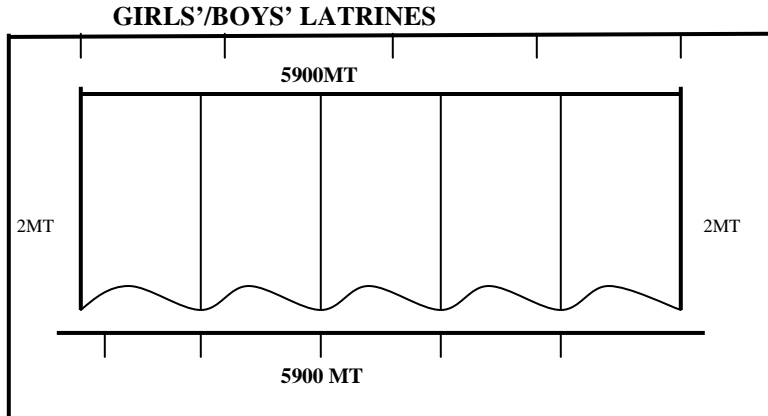

CEMENT = 60 BAGS X 900	= 54, 000
SAND = 21 TONNES X 1,200	= 25, 200
BALLAST = 7TONNES X 3,000	= 21, 000
BRICKS = 1, 800 X 14	= 25, 200
WALL PASH = 25KG X 180	= 4, 500
DAM CORE = 1 X 2,500	= 2, 500
WIRE MESH = 4 X 600	= 2, 400
Y10 MM = 8 X 600	= 4, 800
BINDING WIRE = 6KG 130	= 780
DPM = 6MT X 90	= 450
POSTS = 16 X 150	= 540
TIMBER 4X2 = 150FT X 26	= 3, 900
TIMBER 3X2 = 70FT X 24	= 1, 680
TIMBER 6X1 = 59FT X 24	= 1, 416
MABATI 3MT = 7PS X 600	= 4, 200
ROOFING NAILS = 6KG X 230	= 1, 380
ORDINARY NAILS 4" = 4KG X 130	= 520
ORDINARY NAILS 3" = 4KG X 130	= 520
P.V.C PIPE 4" = 2PCS X 900	= 1, 800
DOORS = 4 X 2, 500	= 10, 000
DOOR FRAMES = 4 X 1, 300	= 5, 200
LATCHES 8" = OUTER DOORS = 4 X 200	= 800
" " (INDOORS) = 4 X 100	= 400
HINGES 4" = 12PCS X 70	= 840
SCREW NAILS = 1PKT X 250	= 250
TRANSPORT	= 20, 000
TOTAL	= KSH.195, 576
LABOUR	= KSH. 75, 000
SPF	= KSH. 30, 000
STAFF TOILETS	= <u>102, 004</u>
GRAND TOTAL	= <u>KSH. 402, 580</u>

BY: MR. ODERO
SALOJA CONSTRUCTION COMPANY.

FOR MORE INFORMATION PLEASE CONTACT:

MR. EVANS KANDIE (HEADTEACHER),
 MOBILE: 0723 -406 700
 E-MAIL: evans.kandie@yahoo.com
 ACCOUNT NUMBER: 1102660930
 BANK: KENYA COMMERCIAL BANK (KCB)
 SWIFT CODE: - KCBL KE NX 017
 BRANCH: ITEN.